

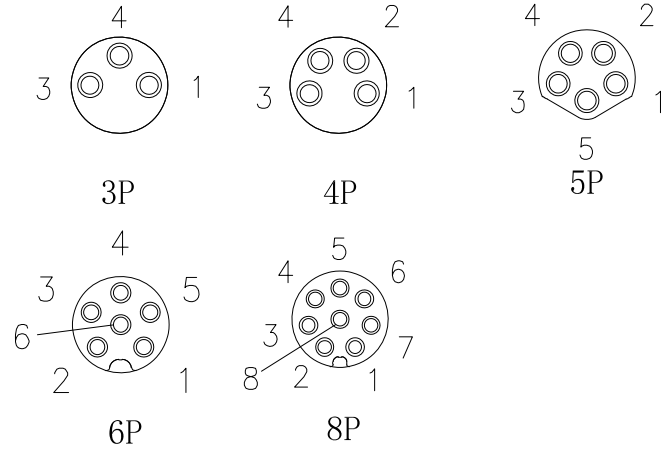




Pin Layout:

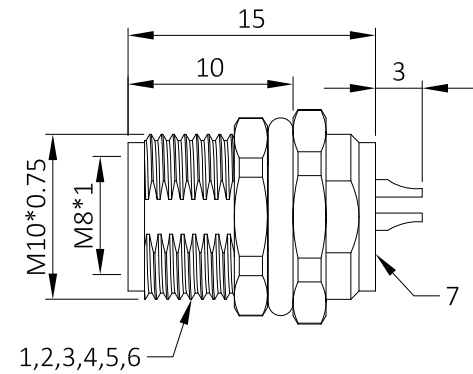

| | | | | | |
|-------------|-------------|--------------|------------|----------|--|
| Product NO. | | RHT-634-3150 | | | |
| ISSUE | DESCRIPTION | DWN | DATE | APPROVEN | |
| R1.0 | First issue | Ding | 2022.06.17 | JIM.KING | |

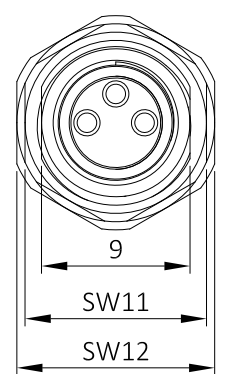

Recommended Panel cut-out

Technical specifications:

- Rated voltage/current:
 - 3P 60V/3A
 - 4P 60V/3A
 - 5P 30V/3A
 - 6P 30V/1.5A
 - 8P 30V/1.5A
- Degree of protection: IP67
- Temperature range: -25°C ~ +80°C
- Mating cycles: ≥ 500
- Contact resistance: ≤ 5mΩ

| | | | |
|-----|-------------|---------------------------------------|------|
| 7 | Epoxy resin | Black | 1 |
| 6 | O-Ring | FKM, Black | 1 |
| 5 | Nut | Brass; Nickel plated | 1 |
| 4 | Body | M8 female Shell, Brass; Nickel plated | 1 |
| 3 | O-Ring | FKM, GREEN | 1 |
| 2 | Housing | M8 3Pin female A-Coding, PA66, Black | 1 |
| 1 | Pin | Brass; Gold-plated | 3 |
| No. | PART NAME | DESCRIPTION | Q'TY |

| | | | | | | |
|---|---|------------|-------------------------|------|------|------|
| -TOLERANCES- UNLESS OTHERWISE SPECIFIED | | | <h1>RENHOTEC GROUP</h1> | | | |
| | PART DESCRIPTION: M8 Female, Panel Mount, front fastened | | | | | |
| UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.25mm 30 - 120mm ± 0.30mm | Appr: | JIM.KING | | | | |
| | Check: | Date | Scale | Unit | Type | Page |
| | Draw: | 2022.06.17 | Free | MM | Z | 1/1 |