





Product NO.		RHT-634-1301		
ISSUE	DESCRIPTION	DWN	DATE	APPROVEN
RI.0	First issue	Gavin	2019/12/17	JIM.KING

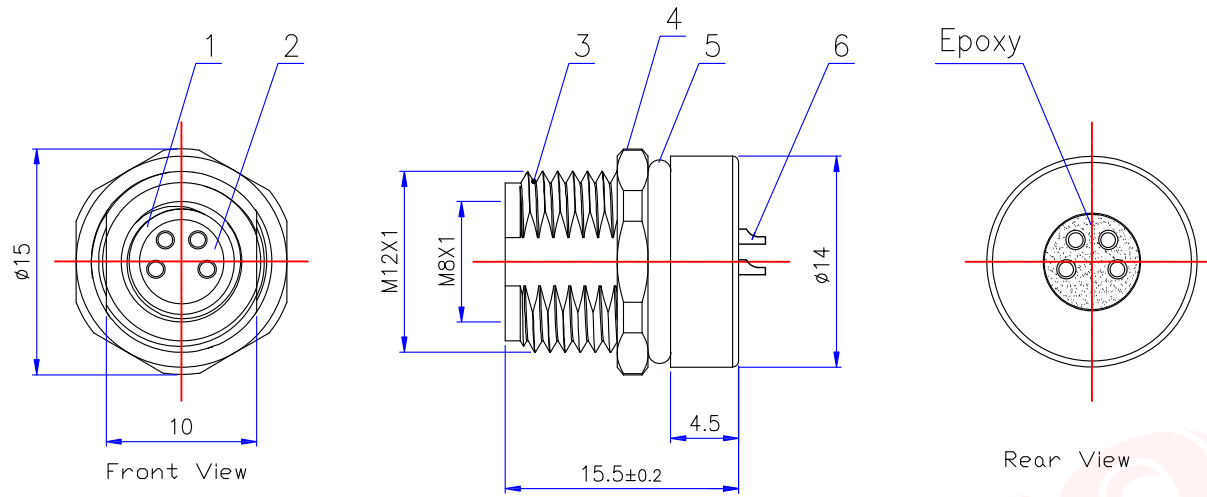


NOTES:

- Rated voltage/current: 3pin: 60V/3A
4pin: 60V/3A
5pin: 60V/3A
6,8pin: 30V/1A
- Withstanding voltage: 3,4pin: AC850V/1 Min
5,6,8pin: AC650V/1 Min
- Levels of protection: IP67
- Connection mode: Soldering
- Operating temperature: -20°C ~+85°C
- RoHS Compliance

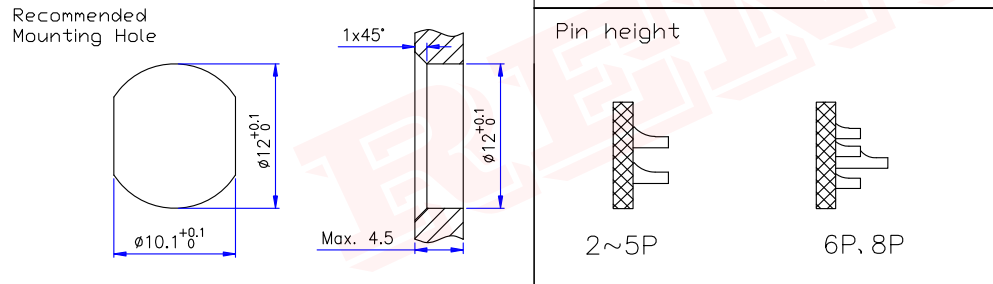

Pin Assignments Front View

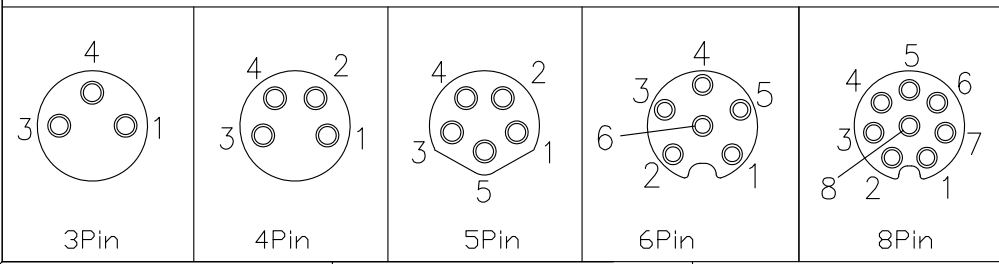

6	Contacts	Brass	Gold	3-8
5	O-Ring	Rubber		1
4	Nut M12*1	Brass	Nickel	1
3	Body	Brass	Nickel	1
2	O-Ring	Rubber		1
1	Insulator	PA66	Black	1
NO	Description	Material	Finish	Qty

-TOLERANCES- UNLESS OTHERWISE SPECIFIED	RENHOTEC GROUP					
	PART DESCRIPTION: Circular Panel Mount, Female, M8					
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.25mm 30 - 120mm ± 0.30mm	Appr: JIM.KING	P/N: RHT-634-1301				
	Check:	Date	Scale	Unit	Type	Page
	Draw: Gavin	2019.12.17	Free	MM	Z	1/1